


HP 4352S


NEW

- Dedicated VCO and PLL parameters test system
- Excellent solution for LAB and production line
- Simple configuration and multifunctional system
- VCO tuning characteristics evaluation

- Outstanding phase noise measurement capability
- High resolution frequency transient measurement
- Automatic measurement capability and powerful analysis functions

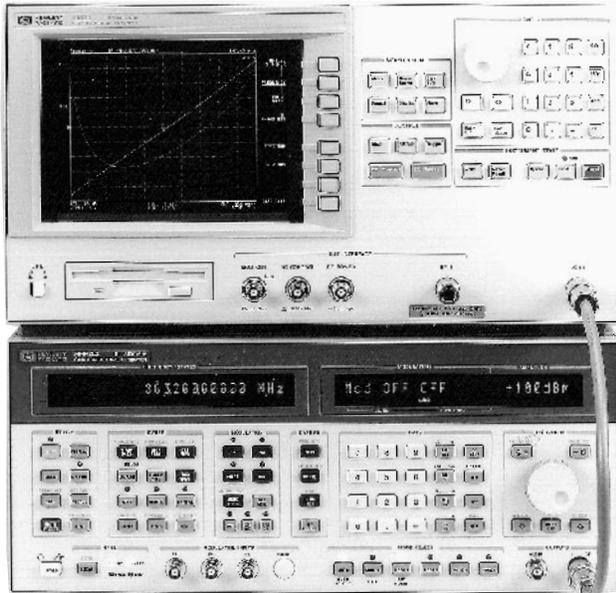

Simple 3GHz Standard System

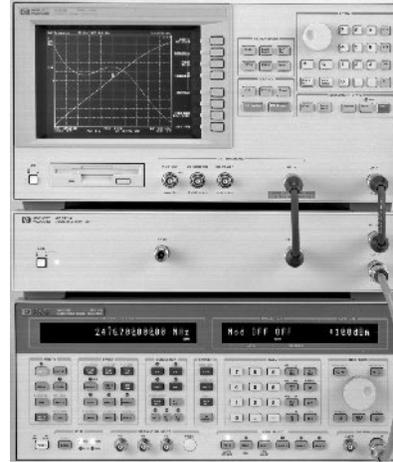

12.6 GHz System

HP 4352S VCO/PLL Signal Test System



The HP 4352S test system can evaluate the characteristics of VCOs and PLLs that are essential to designing local oscillators used in RF wireless communication equipment. This system can provide both powerful analyzing capability for design evaluation in LAB and high speed measurement capability for production line test with 2 operating modes, "Signal Analyzer" and "VCO Tester" mode. The HP 4352S, which consists of the HP 4352B VCO/PLL Signal Analyzer and Hewlett-Packard low-noise signal generator controlled by the HP 4352B, covers up to 3 GHz and can measure the main VCO/PLL evaluation parameters, RF power, frequency, phase noise, spectrum, frequency transient, DC consumption current and FM deviation. In addition, the HP 4352B provides and controls the DC power supply, the low-noise DC control voltage source and the 1 kHz signal source necessary for VCO tuning characterizing.


When configured with the HP 43521A downconverter unit, the HP 4352S offers a dedicated and comprehensive VCO/PLL design and production measurement solution for manufacturers that must test at frequencies over 3 GHz. The enhanced HP 4352S is a complete system that offers a frequency range from 10MHz to 12.6GHz and is capable of measuring phase noise, RF power, transients, settling time, and many more parameters required for VCO/PLL evaluations.

This system can make high-speed measurements thanks to the dedicated firmware and "carrier lock multi-mode PLL" technology for phase noise measurement that enables the system lock unto the carrier of the measured signal automatically. In addition, the HP 4352B has excellent phase noise performance such as -157 dBc/Hz at 1 MHz offset typically, so that this test system can make reliable and repeatable phase noise measurement with up to 10 times reduction in measurement time. Actually it can measure 801 measurement points from 100 Hz to 10 MHz offset in 7.4 seconds/sweep. Besides the powerful phase noise measurement capability, the HP 4352S can measure frequency transient with 50 Hz frequency resolution and 12.5 micro seconds time resolution.


When the HP 71707A Microwave Downconverter is added to the standard system, the phase noise measurement can be performed up to 26.5GHz.

The HP 4352S improves your VCO and PLL evaluation efficiency and testing productivity dramatically.

Measurement Display Examples

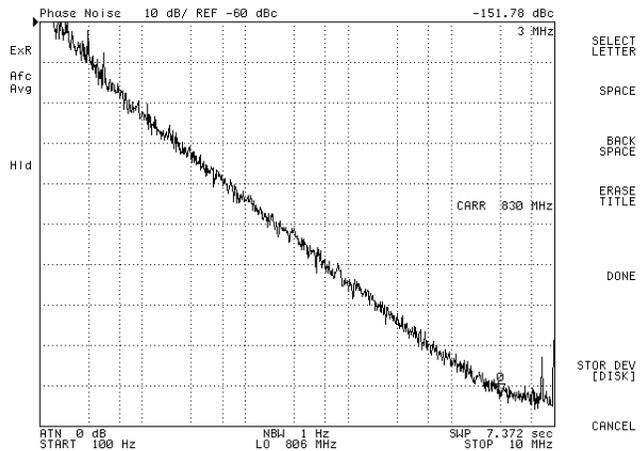

VCO phase noise measurement

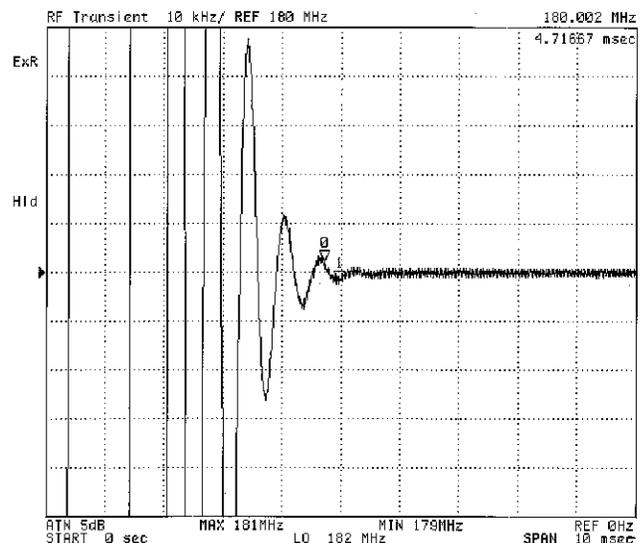

PLL frequency lock time measurement

Efficient Evaluation in Oscillator Circuit Design

The HP 4352S can measure the following characteristics:

For VCO evaluation

- RF power vs. tuning voltage
- Frequency vs. tuning voltage
- Tuning sensitivity
- Phase noise (Carrier-to-Noise)
- Harmonics
- FM deviation
- DC power consumption current

For PLL evaluation

- RF power
- Phase noise (Carrier-to-Noise)
- Frequency and Frequency transient
- Spurious
- Harmonics

Each parameter can be measured without changing any cable connections. So, you can easily evaluate a VCO/PLL with powerful analysis functions such as marker or limit line.

High Throughput and Easy Test Automation

Thanks to the high-speed phase noise measurement capability, it only takes about 2.5 seconds to measure five VCO parameters (RF power, frequency, phase noise, DC power consumption current and FM deviation) by using "VCO Tester" mode. The HP 4352S has the HP Instrument BASIC programming functions, built-in 3.5 inch disk drive (LIF/DOS format) and a 24-bit I/O. These capabilities allow you to interface to an automatic handler so that you can achieve automatic production-line testing without an external computer.

Specifications Summary

Source Characteristics

DC Power Voltage: 0 to +15.5 V with 1 mV step, 50 mA max.

DC Control Voltage: 0 to +20 V with 100 μ V step, 20 mA max.

Option 001: -15 to +35 V

Accuracy: \pm (0.1% + 2 mV)

Settling Time: < 20 ms @ 0.1% error (typical)

Noise Density: < 1 nV \sqrt Hz @ 10 kHz offset

FM Signal: 1 kHz, 0 to 1 Vrms with 1 mV step @ open

Receiver Characteristics

Measurement Frequency Range: 10 MHz to 3 GHz/26 GHz

Input Power Level: -10 to +20 dBm

Input Impedance: 50 Ω

SWR: <1.2 (@ < 2 GHz); <1.3

RF Power Measurement

Accuracy @ Peak Voltage Responding

\pm 0.2 dB (@ 1 GHz, -5 dBm, typical); \pm 1 dB

Resolution: 0.01 dB

Frequency Measurement

Frequency Resolution: 1 kHz

Frequency Transient Measurement

Highest Accuracy: \pm 2 kHz

Highest Measurement Resolution: 50 Hz

Maximum Sweep Time: 10 sec.

Minimum Time Resolution: 12.5 μ sec.

Phase Noise (Carrier-to-Noise Ratio) Measurement

Offset Frequency Range: 100 Hz to 10 MHz

System Noise Level

Offset	Specification (dBc/Hz)	Typical (dBc/Hz)
100 Hz	-85	-90
1 kHz	-110	-117
10 kHz	-130	-137
100 kHz	-140	-147
1 MHz	-150	-157

Spectrum Measurement

Absolute Level Accuracy: 2 dB (-5 dBm input, @ ATT=0 dB, typical)

Relative Level Accuracy: 0.5 dB (typical)

FM Deviation Measurement

Measurement Range: 0 to 200 kHz (peak)

Accuracy: \pm (2% + 0.1% of measurement range) @ 1 kHz FM rate; \pm 0.8% (typical)

Residual FM: < 3 Hzrms (@ 300 Hz - 3 kHz BW)

DC Consumption Current Measurement

Measurement Range: 0 to 50 mA

Accuracy: \pm (0.2% \pm 100 μ A)

Storage

3.5-inch FDD: LIF/DOS format, 2DD/2HD

Internal RAM Disk: LIF/DOS format, 512 kB max.

Interfaces

GPIB I/F, 24-bit parallel I/O I/F

General Characteristics

Display: 9-inch color LCD

Operating Temperature: 0 to +40 $^{\circ}$ C

Operating Humidity: 15 to 95% RH

Storage Temperature/Humidity: 0 to +40 $^{\circ}$ C/15 to 95% RH

Power Requirements: 90 to 132 V or 198 to 264 V, 47 to 66 Hz, 300 VA max.

Size: 235 mm H x 425 mm W x 553 mm D

Weight (typical): 21.5 kg

Key Literature

HP 4352S VCO/PLL Signal Test System Product Overview,
p/n 5966-0805E

Signal Generator Selection Guide, p/n 5091E-7274E

HP 71707A Microwave Downconverter Technical Data, p/n 5091-4435E

Ordering Information

HP 4352S VCO/PLL Signal Test System

HP 4352B VCO/PLL Signal Analyzer

Opt 001 Expand DC Control Voltage

Opt 1A2 Delete Keyboard

HP 43521A Downconverter Unit

Recommended Signal Generators

HP 8664A Synthesized Signal Generator with Option 004

HP 8665A Synthesized Signal Generator with Option 004

HP 8665B Synthesized Signal Generator with Option 004

HP 8644B Synthesized Signal Generator with Option 002

HP 8657B Synthesized Signal Generator

HP 71707A 26 GHz Microwave Downconverter

HP 70422A 18 GHz Downconverter Module

See Signal Sources section for more details.

When using the other signal generators, please contact the HP Call Center in your region for details.